

TOXFREE® ZH N2XH Flex

Halogen free (LSHF) power cable for public places.

ACCORDING TO: IEC 60502-1

BASED ON: VDE 0276-604

B2_{ca}
C_{ca}



APPLICATION

Toxfree® ZH N2XH Flex is a LSHF safety cable for fixed installations. In the event of fire, it does not emit toxic or corrosive gases, preventing any possible harm to people or electronic equipment. For these reasons this cable is highly recommended for use in public places such as hospitals, schools, museums, airports, bus terminals, shopping centers, offices, laboratories, etc.

CONSTRUCTION

Conductor

Electrolytic annealed copper, class 5 (flexible) according to EN 60228 and IEC 60228.

Insulation

Cross-linked polyethylene, type XLPE according to IEC 60502-1 and type 2XII according to VDE 0276-604.

The standard identification of insulated conductors according to HD 308 is the following:

1 x	Natural
2 x	Blue + Brown
3 G	Blue + Brown + Green/Yellow
3 x	Brown + Black + Grey
3 x+1 x	Brown + Black + Grey + Blue (reduced cross-section)
4 G	Brown + Black + Grey + Green/Yellow
4 x	Brown + Black + Grey + Blue
5 G	Brown + Black + Grey + Blue + Green/Yellow

Outer sheath

Low smoke halogen free polyolefin, type ST8 according to IEC 60502-1 and type HM4 according to VDE 0276-604.
Black colour.

CHARACTERISTICS

⚡ Electrical performance

Low voltage: 0,6/1 kV

🔥 Thermal performance

Maximum conductor temperature: 90°C.
Maximum short-circuit temperature: 250°C (max. 5 s).
Minimum service temperature: -40°C (fixed and protected installations).
Minimum installation and handling temperature: 0°C (on cable surface).

🔥 Fire performance

Flame non-propagation according to EN 60332-1 / IEC 60332-1.
Fire non-propagation according to EN 60332-3-24 / IEC 60332-3-24 and EN 50399.
Reaction to fire CPR: B2_{ca}-s1a, d1, a1 or C_{ca}-s1a, d1, a1, according to EN 50575 (see cross-section).
Halogen free according to EN 60754-1 / IEC 60754-1.
Low corrosive gases emission according to EN 60754-2 / IEC 60754-2.
Low smoke emission according to EN 61034 / IEC 61034:
Light transmittance > 80%.

📏 Mechanical performance

Minimum bending radius: 5x cable diameter.
Impact resistance: AG2 Medium severity.

🌐 Environmental performance

Chemical & Oil resistance: acceptable.
UV Resistant according to EN 50618.
Water resistance: AD8 Submersion.

🔧 Installation conditions

Open Air.
Buried.
In conduit.

STANDARDS / COMPLIANCE



According to
IEC 60502-1

Based on
VDE 0276-604




Standards and approvals
KEMA-KEUR / / RoHS / CE



CPR (Construction Products Regulation)
B2_{ca}-s1a, d1, a1 (according to cross-section) or
C_{ca}-s1a, d1, a1 (according to cross-section)



DIMENSIONS & ADMISSIBLE INTENSITIES

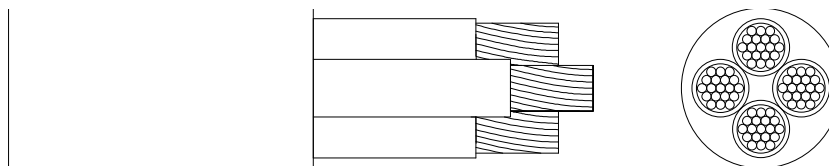

Cross-section (mm ²)	Diameter (mm)	Weight (kg/km)	Open air (A) ¹	Buried (A) ²	Voltage drop (V/A · km) ³
1 x 2,5	7,1	75	29	30	17,7
1 x 4	7,6	95	40	39	11,0
1 x 6	8,2	115	53	49	7,32
1 x 10	9,2	165	74	65	4,23
1 x 16	10,2	225	101	84	2,68
1 x 25	11,8	320	135	107	1,73
1 x 35	12,1	390	169	129	1,23
1 x 50	13,9	535	207	153	0,86
1 x 70	15,7	730	268	188	0,603
1 x 95	17,3	930	328	226	0,457
1 x 120	19,1	1.165	383	257	0,357
1 x 150	21,0	1.445	444	287	0,286
1 x 185	23,1	1.740	510	324	0,235
1 x 240	26,1	2.260	607	375	0,178
1 x 300	28,8	2.815	703	419	0,142
1 x 400	33,8	3.760	823	493	0,108
1 x 500	37,9	4.835	946	558	0,085
1 x 630	43,7	6.385	1.088	634	0,064
2 x 1,5	9,8	130	26	26	34,0
2 x 2,5	10,7	165	36	34	20,4
2 x 4	11,1	190	49	44	12,7
2 x 6	12,2	245	63	56	8,45
2 x 10	13,6	355	86	73	4,89
2 x 16	15,3	495	100	84	3,1
3 G 1,5	11,3	170	26	26	34,0
3 G 2,5	12,1	210	36	34	20,4
3 G 4	12,2	240	49	44	12,7
3 G 6	13,4	315	63	56	8,45
3 G 10	14,8	450	86	73	4,89
3 x 16	16,8	645	100	84	2,68
3 x 25	21,4	1.020	127	107	1,73
3 x 35	23,8	1.345	158	129	1,23
3 x 50	27,2	1.825	192	153	0,86
3 x 70	30,3	2.470	246	188	0,603
3 x 300	61,4	10.020	621	419	0,142
3 x 16 + 1 x 10	19,1	800	100	84	2,68
3 x 25 + 1 x 16	22,5	1.165	127	107	1,73
3 x 35 + 1 x 16	24,4	1.480	158	129	1,23
3 x 50 + 1 x 25	28,6	2.050	192	153	0,86
3 x 70 + 1 x 35	32,9	2.815	246	188	0,603
3 x 95 + 1 x 50	37,1	3.690	298	226	0,457
3 x 120 + 1 x 70	40,8	4.700	346	257	0,357
3 x 150 + 1 x 70	45,9	5.725	399	287	0,286
3 x 185 + 1 x 95	51,4	7.000	456	324	0,235
3 x 240 + 1 x 120	58,6	9.185	538	375	0,178
4 G 1,5	11,7	185	23	23	29,3
4 G 2,5	12,2	225	32	30	17,7
4 G 4	13,2	290	42	39	11,0
4 G 6	14,7	385	54	49	7,32
4 G 10	16,3	565	75	65	4,23

TOXFREE® ZH

N2XH Flex

Cross-section (mm ²)	Diameter (mm)	Weight (kg/km)	Open air (A) ¹	Buried (A) ²	Voltage drop (V/A · km) ³
4 x 16	18,8	815	100	84	2,68
4 x 25	23,8	1.275	127	107	1,73
4 x 35	25,9	1.700	158	129	1,23
4 x 50	30,1	2.310	192	153	0,86
4 x 70	34,8	3.185	246	188	0,603
4 x 95	39,9	4.184	298	226	0,457
4 x 120	44,8	5.305	346	257	0,357
4 x 150	49,3	6.548	399	287	0,286
4 x 185	54,8	7.965	456	324	0,235
4 x 240	62,2	10.305	538	375	0,178
5 G 300	68,5	12.745	621	419	0,142
5 G 1,5	13,1	235	23	23	29,3
5 G 2,5	14,4	300	32	30	17,7
5 G 4	14,8	360	42	39	11,0
5 G 6	16,3	470	54	49	7,32
5 G 10	18,0	685	75	65	4,23
5 G 16	20,9	1.000	100	84	2,68
5 G 25	25,9	1.550	127	107	1,73
5 G 35	28,3	2.050	158	129	1,23
5 G 50	33,7	2.840	192	153	0,86
5 G 70	38,6	3.905	246	188	0,603
5 G 95	43,5	5.080	298	226	0,457
5 G 120	49,3	6.395	346	257	0,357
5 G 150	55,1	7.935	399	287	0,286
5 G 185	61,1	9.665	456	324	0,235
5 G 240	68,8	12.620	538	375	0,178

¹ Reference method F for single-core and method E for multicore cables according to IEC 60364-5-52 in open air at 30°C ambient temperature.

² Reference method D2 according to IEC 60364-5-52. Directly buried at 0,7 m depth with soil thermal resistivity of 2,5 K·m/W and 20°C of ground temperature.

³ At maximum conductor temperature and $\cos\varphi=1$.

Cables having 2 and 3 conductors up to 10 mm² are supposed a single-phase circuit. The rest of the cables are supposed a three-phase circuit.

TOXFREE® ZH

N2XH Flex

SHORT-CIRCUIT CURRENT-CARRYING CAPACITIES

Time (s)	0,1	0,2	0,3	0,5	1	1,5	2	2,5	3
A/mm ²	452	320	261	202	143	117	101	90	83

CORRECTION FACTORS FOR AIR TEMPERATURE

Air T. (°C)	20	25	30	35	40	45	50	55	60
Factor	1,08	1,04	1	0,96	0,91	0,87	0,82	0,76	0,71

CORRECTION FACTORS FOR GROUND TEMPERATURE

Ground T. (°C)	10	15	20	25	30	35	40	45	50
Factor	1,07	1,04	1	0,96	0,93	0,89	0,85	0,80	0,76

CORRECTION FACTORS FOR SOIL THERMAL RESISTIVITY

Moisture degree of soil	Very damp	Slightly damp	Slightly dry	Dry	Very dry
Thermal Resist. (K·m/W)	1	1,5	2	2,5	3
Factor	1,50	1,28	1,12	1	0,90

Other correction factors (for grouping cables, for harmonic currents), that are not in this specification, can be applied. Further information can be found in IEC 60364-5-52.